
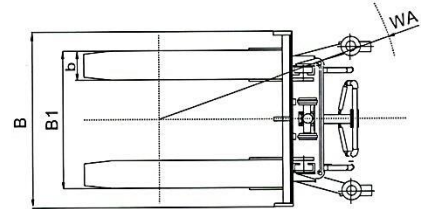


MANUAL STACKER

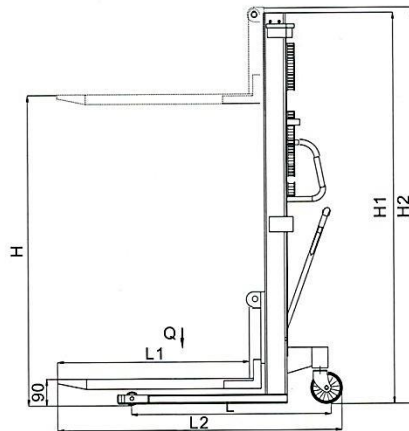

Advantages :

- Robust Steel profile construction.
- An economical lift to handle tasks from transporting dies and moulds skids and pallets.
- Sturdy and compact enough to fit through standard doors and to operate in congested areas.
- Precision engineered for smooth performance and exceptional durability.
- Lifting function operated by foot and hand controls.
- Allow the operator to work without having to perform extreme body movements. RS with adjustable forks.

TECHNICAL DATA		RS-1016	RS-1516	RS-2016
Rated lifting capacity	kg	1000	1500	2000
Max lifting height	mm	1600	1600	1600
Lowered height of forks	mm	90	90	90
Fork length	mm	900	900	900
Adjustable width of forks	mm	320-750	340-750	340-750
Lifting speed	mm	20	18	14
Lowering speed	mm	Controllable	Controllable	Controllable
Outer width of front legs	mm	690	690	690
Min refuel volume for fuel tank	L	1.6	1.8	2.0
Front wheel size	mm	Ø 74x52	Ø 74x70	Ø 74x70
Rear wheel size	mm	Ø 180x50	Ø 180x50	Ø 180x50
Overall size	mm	1390x780x2040	1390x780x2040	1390x780x2040
Self weight	kg	200	235	240

Specifications are subject to change without notice.



Under the Management of Estel Company Limited

79/5 Moo 2 Mahasawat Bangkruey Nonthaburi 11130 Thailand. Tel. 0-2985-2081-9 Ext. 224

Fax. 0-2985-2313 Website : <http://www.rhino-estel.com> E-mail : rhino.estel@gmail.com