
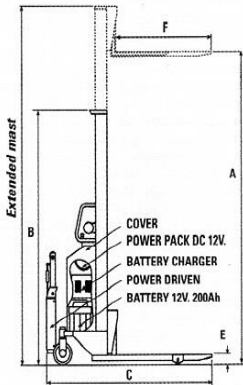
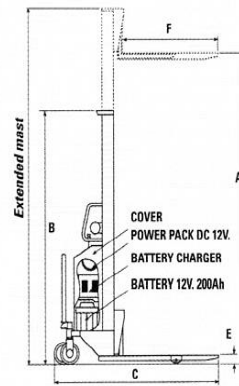


SEMI-ELECTRIC STACKER

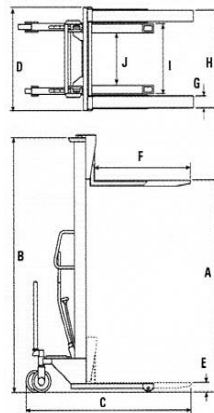

Advantages :

- Carefully designed high quality hydraulic system with relief valve to protect overloading.
- Pump piston and piston lifting rod are chromium-plated for long life.
- Heavy gauge steel is used throughout and durable polyurethane wheels are our standard.
- Control are simple designed for easy operation.
- Reliable safety parking brake.
- Rapid lift by foot pedal.
- Electro-Hydraulic type are available, lifting by 12 VDC motor or 220 VAC motor.
- Electro-Driven type are available, moving by 12 V. -200Ah. Smooth control and show LED.
- For battery operated model, battery charger will be provided.
- Easy operation and maintenance.

TECHNICAL DATA			RS-0619E	RS-0635E	RS-1019E
Lifting capacity	A	kg	600	600	1000
Lifting height	B	mm	1900	3500	1900
Overall height	C	mm	2285	2285	2285
Overall length	D	mm	1720	1720	1790
Overall width	E	mm	860	860	1060
Fork (Lowest position)	F	mm	90	90	90
Fork length	G	mm	1000	1000	1000
Fork width	H	mm	100	100	125
Lateral fork adjustment	I	mm	230 – 850	230 – 850	295 – 1040
Outside between arms	J	mm	800	600	700
Inside between arms		mm	600	450	500
Wheel base		mm	1330	1330	1480
Min. turning radius		mm	1400	1400	1500
Lifting height per stroke		mm	80/SEC	80/SEC	80/SEC
Battery voltage			12V. 200Ah.	12V. 200Ah.	12V. 200Ah.
Total weight		kg	280	380	350

Specifications are subject to change without notice.



Under the Management of Estel Company Limited

79/5 Moo 2 Mahasawat Bangkruey Nonthaburi 11130 Thailand. Tel. 0-2985-2081-9 Ext. 224

Fax. 0-2985-2313 Website : <http://www.rhino-estel.com> E-mail : rhino.estel@gmail.com